




DIN 46228/4 END SLEEVES WITH INSULATION POLYAMID 66

Temperature range: -40°C up to + 105°C


Material: copper Tube with Tin plated.

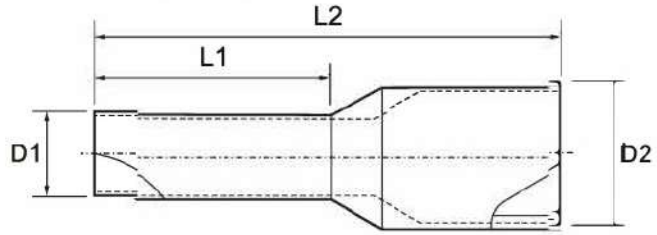

Unit:mm

ITEM NO.	WIRE RANGE (mm ²)	D1	D2	L1	L2	COLOR SYSTEM			PACKING
						T(FRENCH)	W(GERMAN)	D(DIN)	
CE001406	0.14	0.70	1.60	6	10				1000 PCS
CE001408				8	12				
CE002506	0.25	0.75	1.90	6	10				
CE002508				8	12	VIOLET	LIGHTBLUE		
CE003406	0.34	0.80	1.90	6	10				
CE003408				8	12	PINK	TURQUOISE		
CE005006	0.50	1.00	2.60	6	12				500PCS
CE005008				8	14	WHITE	ORANGE	WHITE	
CE005010				10	16				
CE007506	0.75	1.20	2.80	6	12				
CE007508				8	14				
CE007510				10	16	BLUE	WHITE	GRAY	
CE007512				12	18				
CE010006	1.00	1.40	3.00	6	12				
CE010008				8	14				
CE010010				10	16	RED	YELLOW	RED	
CE010012				12	18				
CE015008	1.50	1.70	3.50	8	14				
CE015010				10	16				
CE015012				12	18	BLACK	RED	BLACK	
CE015018				18	20				
CE025008	2.50	2.20	4.20	8	14				
CE025010				10	16	GRAY	BLUE	BLUE	
CE025012				12	18				
CE025018				18	24				
CE040010	4.00	2.80	4.80	10	17				
CE040012				12	20	ORANGE	GRAY	GRAY	
CE040018				18	26				
CE060012	6.00	3.50	6.30	12	20				
CE060018				18	26	GREEN	BLACK	YELLOW	
CE100012	10.00	4.50	7.60	12	22				
CE100018				18	28	BROWN	IVORY	RED	
CE160012	16.00	5.80	8.80	12	24				
CE160018				18	28	IVORY	GREEN	BLUE	
CE250016	25.00	7.30	11.20	16	30				
CE250018				18	30	BLACK	BROWN	YELLOW	
CE250022				22	36				
CE350016	35.00	8.30	12.70	16	30				
CE350018				18	32	RED	BEIGE	RED	
CE350025				25	39				
CE500020	50.00	10.30	15.00	20	36				
CE500025				25	40	BLUE	OLIVE	BLUE	
CE700021	70.00	13.50	16.00	21	37	YELLOW	YELLOW	YELLOW	100PCS
CE950025	95.00	14.70	18.00	25	44	RED	RED	RED	
CE120027	120.00	16.70	20.00	27	48	BLUE	BLUE	BLUE	
CE150032	150.00	19.50	23.00	32	58	YELLOW	YELLOW	YELLOW	

CORD-END TWIN SLEEVE

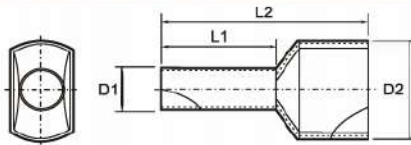


ITEM NO.	WIRE RANGE (mm ²)	D1	D2	L1	L2	COLOR SYSTEM			PACKING
						T(FRENCH)	W(GERMAN)	D(DIN)	
CT205008	2x0.50	1.5	2.5/4.7	8.0	15.0	WHITE	ORANGE	WHITE	500 pcs
CT207508	2x0.75	1.8	2.8/5.0	8.0	15.0	BLUE	WHITE	GRAY	
CT207510				10.0	17.0				
CT210008	2x1.00	2.05	3.4/5.4	8.0	15.0	RED	YELLOW	RED	
CT210010				10.0	17.0				
CT215008	2x1.50	2.3	3.6/6.6	8.0	16.0	BLACK	RED	BLACK	
CT215012				12.0	20.0				
CT225010	2x2.50	2.8	4.2/7.8	10.0	18.5	GRAY	BLUE	BLUE	
CT225013				13.0	21.5				
CT240012	2x4.00	3.7	4.9/8.8	12.0	23.0	ORANGE	GRAY	GRAY	
CT260014	2x6.00	4.8	6.9/10.0	14.0	26.0	GREEN	BLACK	YELLOW	
CT2100014	2x10.00	6.4	7.6/12.8	14.0	26.5	BROWN	IVORY	RED	
CT2160014	2x16.00	8.3	9.6/18.6	14.0	31.5	IVORY	GREEN	BLUE	

DIN 46228/4 END SLEEVES WITH INSULATION POLYAMID 66

Temperature range: -40°C up to + 105°C

Material: copper Tube with Tin plated.

NON-INSULATED CORD-END SLEEVE

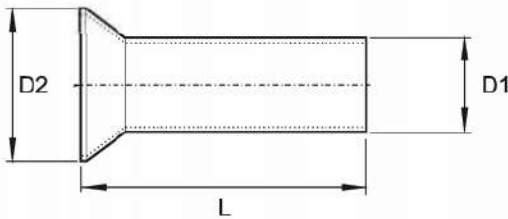


- Material: copper Tube with Tin plated.
- DIN 46228/1

CN500018	50.00	10.3	13.0	18.0	1000pcs			
CN500020				20.0				
CN500022				22.0				
CN500025				25.0				
CN700022	70.00	13.5	15.3	22.0				
CN700025				25.0				
CN700032				32.0				
CN950025				95.00		14.7	16.6	25.0
CN950032	32.0							
CN120030	120.00	16.7	18.6					30.0
CN120032								32.0
CN120034				34.0				
CN150032				150.00		19.5	21.5	32.0
CN150038	38.0							

ITEM NO.	WIRE RANGE (mm ²)	D1	D2	L	PACKING
CN005006	0.50	1.0	2.1	6.0	1000pcs
CN005008				8.0	
CN005010				10.0	
CN007506	0.75	1.2	2.3	6.0	
CN007508				8.0	
CN007510				10.0	
CN010006	1.00	1.4	2.5	6.0	
CN010008				8.0	
CN010010				10.0	
CN010012				12.0	
CN015007	1.50	1.7	2.8	7.0	
CN015008				8.0	
CN015010				10.0	
CN015012				12.0	
CN025007	2.50	2.2	3.4	7.0	
CN025008				8.0	
CN025010				10.0	
CN025012				12.0	
CN025018				18.0	
CN040008	4.00	2.8	4.0	8.0	
CN040009				9.0	
CN040010				10.0	
CN040012				12.0	
CN040015				15.0	
CN040018				18.0	
CN060010	6.00	3.5	4.7	10.0	
CN060012				12.0	
CN060015				15.0	
CN060018				18.0	
CN100012	10.00	4.5	5.8	12.0	
CN100015				15.0	
CN100018				18.0	
CN160012				16.00	5.8
CN160015	15.0				
CN160018	18.0				
CN250015	25.00	7.3	9.5	15.0	
CN250016				16.0	
CN250018				18.0	
CN250020				20.0	
CN250022				22.0	
CN350016	35.00	8.3	11.0	16.0	
CN350018				18.0	
CN350020				20.0	
CN350025				25.0	

INSULATED SPADE TERMINAL


Unit:mm

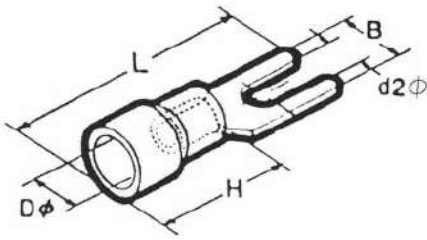

ITEM NO.	DIMENSIONS					WIRE RANGE		COLOR
	d2φ	B	L	H	Dφ	mm ²	AWG	
VY1-3SL	3.2	5.7	21.0	11.0	4.0	0.5~1.5	22~16	RED
VY1-3	3.7	5.7	21.0	11.0	4.0			
VY1-3L	3.7	6.2	21.0	11.0	4.0			
VY1-4	4.3	6.4	21.0	11.0	4.0			
VY1-4L	4.3	7.2	21.0	11.0	4.0			
VY1-5	5.3	8.0	21.0	11.0	4.0			
VY1-6	6.4	10.7	22.5	11.0	4.0	1.5~2.5	16~14	BLUE
VY2-3S	3.2	5.7	21.0	11.0	4.5			
VY2-3	3.7	5.7	21.0	11.0	4.5			
VY2-3L	3.7	6.2	21.0	11.0	4.5			
VY2-4	4.3	6.4	21.0	11.0	4.5			
VY2-4L	4.3	7.2	21.0	11.0	4.5			
VY2-5	5.3	8.0	21.0	11.0	4.5	4.0~6.0	12~10	YELLOW
VY2-6	6.4	10.7	21.0	11.0	4.5			
VY5-3	3.7	8.2	24.7	13.7	6.3			
VY5-4	4.3	8.2	24.7	13.7	6.3			
VY5-5	5.3	9.0	24.7	13.7	6.3	8	8	RED
VY5-6	6.4	12.0	24.7	13.7	6.3			
VY8-6	6.4	12.0	32.0	13.7	6.3			


INSULATED RING TERMINAL

Unit:mm

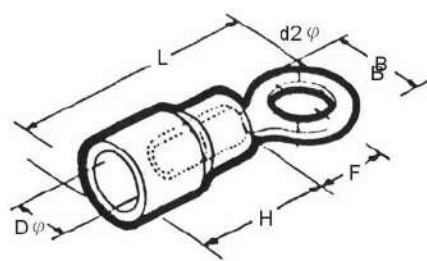


ITEM NO.	DIMENSIONS					WIRE RANGE		COLOR
	d2φ	B	L	H	Dφ	mm ²	AWG	
VR1-3S	3.2	5.5	16.3	11.0	4.0	0.5~1.5	22~16	RED
VR1-3	3.7	5.5	16.3	11.0	4.0			
VR1-3L	3.7	6.6	17.6	11.0	4.0			
VR1-4	4.3	8.0	18.3	11.0	4.0			
VR1-4L	4.3	6.6	17.6	11.0	4.0			
VR1-5	5.3	8.0	18.3	11.0	4.0			
VR1-6	6.4	11.6	22.4	11.0	4.0	1.5~2.5	16~14	BLUE
VR1-8	8.4	13.6	30.0	11.0	4.0			
VR1-10	10.5	13.6	30.0	11.0	4.0			
VR2-3S	3.2	8.5	18.7	11.0	4.5			
VR2-3	3.7	8.5	18.7	11.0	4.5			
VR2-3L	3.7	6.6	17.3	11.0	4.5			
VR2-4	4.3	8.5	18.7	11.0	4.5			
VR2-4L	4.3	6.6	17.3	11.0	4.5			
VR2-5	5.3	9.5	18.2	11.0	4.5	4.0~6.0	12~10	YELLOW
VR2-6	6.4	12.0	22.0	11.0	4.5			
VR2-8	8.4	12.0	22.0	11.0	4.5			
VR2-10	10.5	13.6	24.9	11.0	4.5			
VR5-3	3.7	9.5	26.3	13.7	6.3	8	8	RED
VR5-4	4.3	9.5	26.3	13.7	6.3			
VR5-5	5.3	9.5	26.3	13.7	6.3			
VR5-6	6.4	11.0	28.0	13.7	6.3			
VR5-8	8.4	15.0	34.0	13.7	6.3			
VR5-10	10.5	15.0	34.0	13.7	6.3			
VR5-12	13.0	15.0	34.0	13.7	6.3			
VR8-5	5.3	10.0	29.5	17.0	7.0	8	8	RED
VR8-6	6.4	12.0	31.0	17.0	7.0			
VR8-8	8.4	14.0	37.0	17.0	7.0			
VR8-10	10.5	18.0	38.0	17.0	7.0			

INSULATED BUTT CONNECTOR

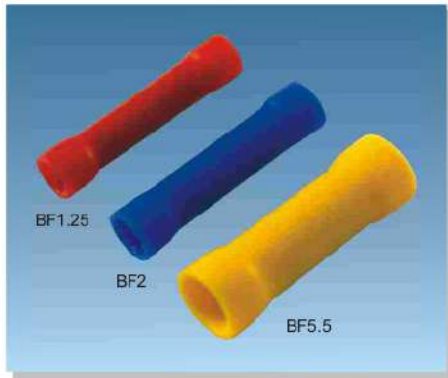

Unit:mm

ITEM NO.	DIMENSIONS				WIRE RANGE		COLOR
	d φ	D φ	L	l	mm ²	AWG	
VBC-1	1.8	4.0	22.7	15.0	0.5~1.5	22~16	RED
VBC-2	2.3	4.5	22.7	15.0	1.5~2.5	16~14	BLUE
VBC-5	3.5	6.8	26.7	15.0	4.0~6.0	12~10	YELLOW




HEAT SHRINKABLE BUTT CONNECTOR


● TERMINAL MATERIAL: COPPER TUBE

● INSULATION MATERIAL: PE HEAT SHRINKABLE


■ HEAT-SHRINKABLE SEALED CRIMP SPLICES, TERMINALS AND DISCONNECTORS

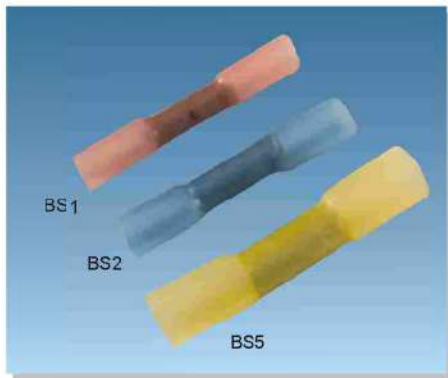

ITEM NO.	WIRE SIZE	WIRE RANGE		COLOR
		mm ²	AWG	
BS 1	22-18 A.W.G.(0.5-1.5mm ²)	0.5~1.5	22~16	RED
BS 2	16-14 A.W.G.(1.5-2.5mm ²)	1.25~2.5	16~14	BLUE
BS 5	12-10 A.W.G.(4.0-6.0mm ²)	4.0~6.0	12~10	YELLOW



INSULATED PIN TERMINAL

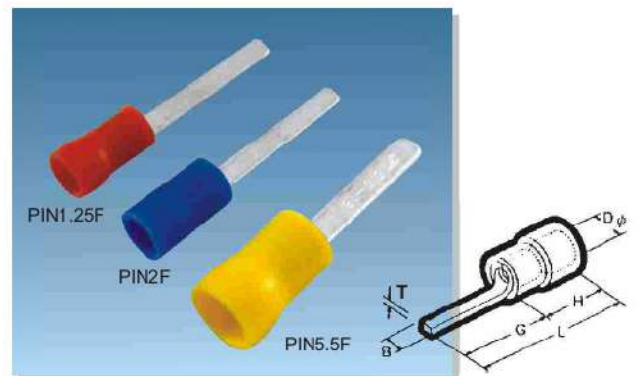


Unit:mm

ITEM NO.	DIMENSIONS						WIRE RANGE		COLOR
	F φ	L	H	B	T	G	mm ²	AWG	
VPT-1		22.9	11				0.5~1.5	22~16	RED
VPT-2		22.9	11				1.5~2.5	16~14	BLUE
VPT-5.5		27.3	16				4.0~6.0	12~10	YELLOW
VPT-1F(14)		18.5	4.5	3.1	0.8	14	0.5~1.5	22~16	RED
VPT-1F(18)		22.5	4.5	3.1	0.8	18	0.5~1.5	22~16	RED
VPT-2F(14)	2.0	18.5	4.5	3.1	0.8	14	1.5~2.5	16~14	BLUE
VPT-2F(18)	2.0	22.5	4.5	3.1	0.8	18	1.5~2.5	16~14	BLUE
VPT-5F	2.7	24.5	6.5	3.3	1.0	18	4.0~6.0	12~10	YELLOW

INSULATED MALE CONNECTOR


Unit:mm



ITEM NO.	DIMENSIONS						WIRE RANGE		COLOR
	B	L	t	d φ	D φ	H	mm ²	AWG	
VD1-2.8M	2.8	22.0	0.5	1.8	3.9	10.0	0.5~1.5	22~16	RED
VD1-2.8M	2.8	22.0	0.8	1.8	3.9	10.0	0.5~1.5	22~16	
VD1-4.5M	4.5	22.0	0.5	1.8	3.9	10.0	0.5~1.5	22~16	
VD1-4.5M	4.5	22.0	0.8	1.8	3.9	10.0	0.5~1.5	22~16	
VD1-6.3M	6.3	22.0	0.8	1.8	3.9	10.0	0.5~1.5	22~16	
VD2-2.8M	2.8	22.0	0.5	2.4	4.2	10.0	1.5~2.5	16~14	BLUE
VD2-2.8M	2.8	22.0	0.8	2.4	4.2	10.0	1.5~2.5	16~14	
VD2-4.5M	4.5	22.0	0.5	2.4	4.2	10.0	1.5~2.5	16~14	
VD2-4.5M	4.5	22.0	0.8	2.4	4.2	10.0	1.5~2.5	16~14	
VD2-6.3M	6.3	22.0	0.8	2.4	4.2	10.0	1.5~2.5	16~14	
VD5-6.3M	6.3	24.0	0.8	3.5	5.5	14.0	4.0~6.0	12~10	YELLOW

INSULATED FEMALE CONNECTOR

Unit:mm




ITEM NO.	DIMENSIONS						WIRE RANGE		COLOR
	B	L	t	d φ	D φ	H	mm ²	AWG	
VD1-2.8F	3.3	22.0	0.5	1.8	3.9	10.0	0.5~1.5	22~16	RED
VD1-2.8F	3.3	22.0	0.8	1.8	3.9	10.0	0.5~1.5	22~16	
VD1-4.5F	4.9	22.0	0.5	1.8	3.9	10.0	0.5~1.5	22~16	
VD1-4.5F	4.9	22.0	0.8	1.8	3.9	10.0	0.5~1.5	22~16	
VD1-6.3F	6.7	22.0	0.8	1.8	3.9	10.0	0.5~1.5	22~16	
VD2-2.8F	3.3	22.0	0.5	2.4	4.2	10.0	1.5~2.5	16~14	BLUE
VD2-2.8F	3.3	22.0	0.8	2.4	4.2	10.0	1.5~2.5	16~14	
VD2-4.5F	4.9	22.0	0.5	2.4	4.2	10.0	1.5~2.5	16~14	
VD2-4.5F	4.9	22.0	0.8	2.4	4.2	10.0	1.5~2.5	16~14	
VD2-6.3F	6.7	22.0	0.8	2.4	4.2	10.0	1.5~2.5	16~14	
VD5-6.3F	6.9	24.0	0.8	3.5	5.5	14.0	4.0~6.0	12~10	YELLOW

INSULATED PIGGY BACK CONNECTOR

Unit:mm



ITEM NO.	DIMENSIONS							WIRE RANGE		COLOR
	B	B1	L	d φ	D φ	H	t	mm ²	AWG	
VD1-6.3FM	6.8	6.3	22.0	1.8	3.9	10.0	0.8	0.5~1.5	22~16	RED
VD2-6.3FM	6.8	6.3	22.0	2.3	4.2	10.0	0.8	1.5~2.5	16~14	BLUE
VD5-6.3FM	6.8	6.3	22.5	3.5	5.5	13.5	0.8	4.0~6.0	12~10	YELLOW

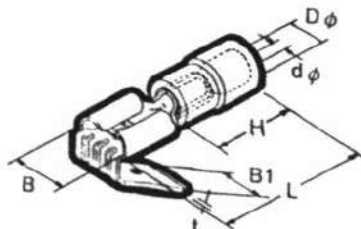


NYLON FULLY INSULATED MALE CONNECTOR



Unit:mm

ITEM NO.	DIMENSIONS						WIRE RANGE		COLOR
	B	L	t	d ϕ	D ϕ	H	mm ²	AWG	
RM250FLP	6.3	22.0	0.8	1.8	3.9	10.0	0.5~1.5	22~16	RED
BM250FLP	6.3	22.0	0.8	2.4	4.2	10.0	1.5~2.5	16~14	BLUE
YM250FLP	6.3	24.0	0.8	3.5	5.5	14.0	4.0~6.0	12~10	YELLOW




FULLY INSULATED FEMALE CONNECTOR



Unit:mm

ITEM NO.	DIMENSIONS							WIRE RANGE		COLOR
	B	W	L	d ϕ	D ϕ	G	H	mm ²	AWG	
RF250FLP	6.8	9.6	23.7	1.8	3.9	6.4	7.4	0.5~1.5	22~16	RED
BF250FLP	6.8	9.6	23.7	2.3	4.2	6.4	7.4	1.5~2.5	16~14	BLUE
YF250FLP	6.8	9.6	24.1	3.5	5.5	6.4	7.4	4.0~6.0	12~10	YELLOW
LVD1-6.3F	6.8	9.6	23.7	1.8	3.9	6.4	7.4	0.5~1.5	22~16	RED
LVD2-6.3F	6.8	9.6	23.7	2.3	4.2	6.4	7.4	1.5~2.5	16~14	BLUE
LVD5-6.3F	6.8	9.6	24.1	3.5	5.5	6.4	7.4	4.0~6.0	12~10	YELLOW



QUICK SPLICE CONNECTOR



Unit:mm

ITEM NO.	DIMENSIONS		WIRE RANGE		COLOR
	L	B	mm ²	AWG	
3MR	20	22	0.5~1.5	22~16	RED
3MB	20	22	1.5~2.5	16~14	BLUE
3MY	21	32	4.0~6.0	12~10	YELLOW
9080501			0.5~1.5	22~16	RED
9080502			1.5~2.5	16~14	BLUE
90811			0.5~1.5	22~16	RED
90812			1.5~2.5	16~14	BLUE
90813			4.0~6.0	12~10	YELLOW

PLUG-IN WIRE CONNECTOR



Specification:

* Housing Material: Thermoplastic, UL94V-2 flame retardant.

* Current: 24A (VDE).

* Voltage: UL-600V, VDE-450V.

* Working Temp: 110°C.

* Wire Range: 12-22 AWG Solid conductor.



* Stripping Length: 11mm(0.43 inch).

* Color: Coded according to different position.

* UL File No: E-113650


ITEM NO.	COLOR	mm ²	POLES	PCS/BAG	PCS/CTN..
PC-252	RED	2.5	2	500	5000
PC-253	ORAGNE	2.5	3	500	5000
PC-254	YELLOW	2.5	4	500	5000
PC-255	GRAY	2.5	5	500	5000
PC-258	BLACK	2.5	8	250	2500

INSULATED BULLET CONNECTOR

Unit:mm



ITEM NO.	DIMENSIONS				WIRE RANGE		COLOR
	d φ	D φ	I	L	mm ²	AWG	
F1.25A	3.96	3.9	11.0	22.0	0.5~1.5	22~16	RED
F2A(4)	3.96	4.2	11.0	22.0	1.5~2.5	16~14	BLUE
F2A(5)	4.96	4.2	11.0	22.0	1.5~2.5	16~14	BLUE
F5.5A(5)	4.96	5.5	13.7	25.1	4.0~6.0	12~10	YELLOW




INSULATED SOCKET CONNECTOR

Unit:mm



ITEM NO.	DIMENSIONS				WIRE RANGE		COLOR
	E	I	L	D φ	mm ²	AWG	
F1.25B	14.0	10.0	24.0	3.9	0.5~1.5	22~16	RED
F2B(4)	14.0	11.0	25.0	4.2	1.5~2.5	16~14	BLUE
F2B(5)	14.0	11.0	25.0	4.2	1.5~2.5	16~14	BLUE
F5.5B(5)	13.5	12.0	25.5	5.5	4.0~6.0	12~10	YELLOW




NYLON FULLY INSULATED BULLET CONNECTOR

Unit:mm



ITEM NO.	DIMENSIONS						WIRE RANGE	
	B	F	L	E	D	d1	mm ²	AWG
BD1-4AF	4.0	10.5	26.5	10.0	4.2	1.7	0.5~1.5	22~16
BD2-4AF	4.0	10.5	26.5	10.0	4.9	2.3	1.25~2.5	16~14
BD2-5AF	5.0	10.0	23.5	10.5	4.9	2.3	1.25~2.5	16~14
BD5-5AF	5.0	10.0	26.0	13.0	6.5	3.4	4.0~6.0	12~10




NYLON FULLY INSULATED SOCKET CONNECTOR

Unit:mm



ITEM NO.	DIMENSIONS						WIRE RANGE	
	B	F	L	E	D	d1	mm ²	AWG
RE1-4AF	4.0	9.0	25.2	11.0	4.2	1.7	0.5~1.5	22~16
RE2-4AF	4.0	9.0	25.2	11.0	4.9	2.3	1.25~2.5	16~14
RE-2-5AF	5.0	9.0	23.0	10.5	4.9	2.3	1.25~2.5	16~14
RE5-5AF	5.0	9.0	25.5	13.0	6.5	3.4	4.0~6.0	12~10



CLOSE-END CONNECTOR



ITEM NO.	A mm	B mm	C mm	SUITABLE WIRES		APPROVED		CRIMPING TOOLS	PACKING
				MIN	A.W.G.	UL	CSA		
CE-1	18.0	6.2	2.6	Max.2 #20 w/1 #18 Min.2 #22	22~18	UL	SP	AK-25 MR30A	1000pcs
CE-2	19.7	7.9	3.0	Max.1 #18 w/1 #14 Min.2 #22	22~14	UL	SP		
CE-5	25.5	10.5	4.0	Max.3 #18 w/1 #12 Min.2 #22 w/2 #18	22~10	UL	SP		
CE-8	27.7	12.4	5.3	Max.2 #16 w/1 #10 Min.2 #16 w/1 #12	16~10	UL	SP	AK-28(UL) YS-82(UL)	500pcs

● UL and CSA rated at 300 volt, except as noted.

● Temperature rated at 105°C

UL E113650 SP LR68461

ALL-PLASTIC WIRE CONNECTOR



ITEM NO.	A mm	B mm	C mm	SUITABLE WIRES A.W.G.	APPROVED		COLOR	PACKING
					UL	CSA		
U1	14.3	8.6	6.5	Max.2 #16 w/1 #22 Min.2 #22	UL	SP	YELLOW	1000pcs
U2	17.2	10.0	7.9	Max.3 #16 Min.3 #20	UL	SP	IVORY	
U3	22.2	11.1	9.1	Max.2 #14Str. w/1 #20 Min.2 #22	UL	SP	IVORY	


● U1, U2 rated at 300 volt, U3 rated at 600 volts.

● Temperature rated at 105°C

UL E113650 SP LR68461

※ without spring

SCREW-ON WIRE CONNECTOR



ITEM NO.	A mm	B mm	C mm	SUITABLE WIRES A.W.G.	APPROVED		COLOR	PACKING
					UL	CSA		
P1	15.2	8.6	6.7	Max.1 #14 w/1 #20 Min.2 #22	UL	SP	GRAY	1000pcs
P2	17.6	9.8	7.0	Max.1 #14 w/1 #16 Min.1 #18 w/2 #22	UL	SP	BLUE	
P3	22.0	12.2	9.9	Max.4 #16 w/1 #20 Min.1 #18 w/1 #20	UL	SP	ORANGE	500pcs
P4	24.0	14.0	11.2	Max.1 #10 w/2 #14 w/1 #16 Min.3 #20	UL	SP	YELLOW	
P6	26.5	16.4	13.0	Max.3 #10 Min.3 #18	UL	SP	RED	


● Rated at 300 volt, except as noted.

● Temperature rated at 105°C

UL LISTED
81U0
E113650 SP LR68461

※ With spring insert

SCREW-ON WIRE CONNECTOR-TYPE H

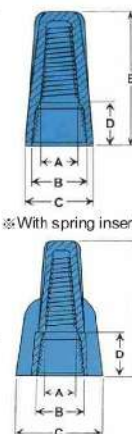

ITEM NO.	A mm	B mm	C mm	D mm	E mm	SUITABLE WIRES A.W.G.	APPROVED		COLOR	PACKING
							UL	CSA		
P3H	5.0	9.9	12.2	7.8	21.9	Max.4 #16 w/1 #20 Min.1 #18 w/1 #20	UL	SP	ORANGE	500pcs
P4H	6.0	11.2	14.0	7.9	23.8	Max.1 #10 w/2 #14 w/1 #16 Min.3 #20	UL	SP	YELLOW	
P6H	7.0	12.8	16.0	8.9	26.6	Max.3 #10 Min.3 #18	UL	SP	RED	
SP11H	6.4	9.8	18.2	9.0	25.8	Max.3 #12 Min.2 #18	UL	SP	YELLOW	


● Rated at 300volt

● Temperature rated at 105°C

● Color code to industry standards

※ With spring insert

COPPER TUBE TERMINAL

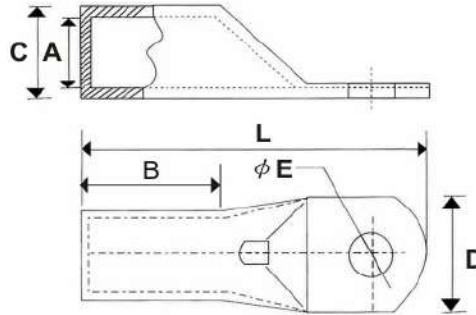

Manufactured from soft drawn pure copper tube to JIS-H3300, C 1020T-0 (Oxygen-Free Copper) which gives the best properties possible.

A complete range terminals, ranging from 1.5mm² to 1000mm² with cable inspection hole.

ITEM NO.	CABLE SQ.	STUD HOLD SIZE	DIMENSIONS				
		ϕE	C	A	D	B	L
CT1.5-4	1.5	4.2	4.0	2.4	8.7	7.0	19.0
CT1.5-5		5.2	4.0	2.4	8.7	7.0	19.0
CT1.5-6		6.5	4.0	2.4	10.0	7.0	20.0
CT2.5-4	2.5	4.2	4.3	2.7	8.7	7.0	19.0
CT2.5-5		5.2	4.3	2.7	8.7	7.0	19.0
CT2.5-6		6.5	4.3	2.7	10.3	7.0	21.0
CT2.5-8		8.4	4.3	2.7	12.0	7.0	23.0
CT4-4	4	4.2	4.8	3.1	8.7	9.5	21.5
CT4-5		5.2	4.8	3.1	8.7	9.5	21.5
CT4-6		6.5	4.8	3.1	10.3	9.5	23.5
CT4-8		8.4	4.8	3.1	12.5	9.5	28.5
CT6-4	6	4.2	5.5	3.8	10.3	10.0	26.0
CT6-5		5.2	5.5	3.8	10.3	10.0	26.0
CT6-6		6.5	5.5	3.8	10.3	10.0	26.0
CT6-8		8.4	5.5	3.8	13.9	10.0	29.0
CT6-10		10.5	5.5	3.8	13.9	10.0	29.0
CT10-4	10	4.2	6.9	4.7	11.9	11.5	27.5
CT10-5		5.2	6.9	4.7	11.9	11.5	27.5
CT10-6		6.5	6.9	4.7	11.9	11.5	27.5
CT10-8		8.4	6.9	4.7	13.5	11.5	30.5
CT10-10		10.5	6.9	4.7	15.0	11.5	30.5
CT10-12		13.0	6.9	4.7	17.0	11.5	34.0
CT16-5	16	5.2	7.8	5.6	12.0	12.0	27.5
CT16-6		6.5	7.8	5.6	12.0	12.0	27.5
CT16-8		8.4	7.8	5.6	13.5	12.0	31.0
CT16-10		10.5	7.8	5.6	16.0	12.0	32.0
CT16-12		13.0	7.8	5.6	17.0	12.0	37.5
CT25-6	25	6.5	9.5	7.1	14.0	13.5	34.0
CT25-8		8.4	9.5	7.1	14.0	13.5	34.0
CT25-10		10.5	9.5	7.1	16.0	13.5	37.0
CT25-12		13.0	9.5	7.1	18.0	13.5	40.0

ITEM NO.	CABLE SQ.	STUD HOLD SIZE	DIMENSIONS				
		ϕE	C	A	D	B	L
CT35-6	35	6.5	11.0	8.2	16.5	16.0	39.0
CT35-8		8.4	11.0	8.2	16.5	16.0	39.0
CT35-10		10.5	11.0	8.2	16.5	16.0	43.0
CT35-12		13.0	11.0	8.2	18.0	16.0	43.0
CT35-14		15.0	11.0	8.2	20.0	16.0	48.0
CT40-6		40	6.5	11.2	9.0	17.0	17.0
CT40-8	8.4		11.2	9.0	17.0	17.0	44.0
CT40-10	10.5		11.2	9.0	17.0	17.0	44.0
CT40-12		13.0	11.2	9.0	18.0	17.0	44.0
CT50-6	50	6.5	12.5	9.5	18.0	20.0	45.0
CT50-8		8.4	12.5	9.5	18.0	20.0	45.0
CT50-10		10.5	12.5	9.5	18.0	20.0	49.0
CT50-12		13.0	12.5	9.5	18.0	20.0	49.0
CT50-14		15.0	12.5	9.5	22.0	20.0	54.0
CT50-16		17.0	14.0	9.5	25.0	23.0	62.0
CT50-20		21.0	14.0	9.5	30.0	23.0	68.0
CT70-8	70	8.4	15.0	11.5	22.0	20.0	47.6
CT70-10		10.5	15.0	11.5	22.0	20.0	51.6
CT70-12		13.0	15.0	11.5	22.0	20.0	51.6
CT70-14		15.0	15.0	11.5	22.0	20.0	62.6
CT70-16		17.0	15.0	11.5	22.0	20.0	62.6
CT70-20		21.0	15.0	11.5	30.0	20.0	62.6
CT95-8	95	8.4	17.0	13.5	25.0	22.0	55.8
CT95-10		10.5	17.0	13.5	25.0	22.0	55.8
CT95-12		13.0	17.0	13.5	25.0	22.0	55.8
CT95-14		15.0	17.0	13.5	25.0	22.0	66.8
CT95-16		17.0	17.0	13.5	25.0	22.0	66.8
CT95-20		21.0	17.0	13.5	30.0	22.0	66.8